Miele

PureLine Truffle Brown 24” Speed Oven

H 6200 BM HVBR

mieleusa.com

H 6200 BM HVBR
Features:

- DirectSelect controls offer turn dial operation with a 7-segment liquid crystal display
- 9 operating modes
- Rapid Preheat
- PerfectClean interior
- 1,000 watt microwave
- Popcorn button
- Minute Plus button - time and power individually programmable
- Timer
- The simple yet sleek Silhouette handle seems to float enhancing its modern design lines

Comfort Handle:
Optional with ContourLine

(DS 6708 Item #09828380)

ComfortSwivel Handle:
Standard with ContourLine
Optional for PureLine
(DS 6718 Item # 09828390)

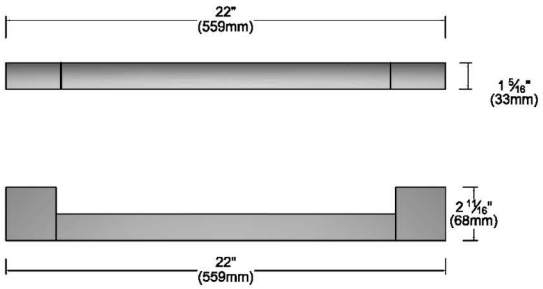



Silhouette Handle:
Standard with Pureline
Optional for Contourline
(DS 6808 Item # 09828400)

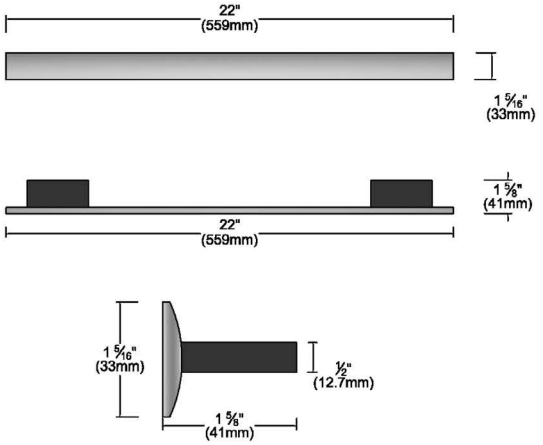

Silhouette Handle (Chrome):
Standard with BrilliantWhite
(DS 6808 Item # 09828410)

Silhouette Handle:
Standard with Truffle Brown
(DS 6808 Item # 09870690)

SPECIFICATIONS	
H 6200 BM HVBR— Item 22620004USA	
Overall Unit Width - Excluding Fascia Dimension	22 1/16” (560mm)
Overall Height - Excluding Fascia Dimension	17 1/2” (445mm)
Overall Unit Depth - Excluding Fascia Dimension	21 9/16” (549mm)
Oven Door Clearance	34 13/16” (885mm)
Overall Fascia Dimensions	23 7/16” (595mm) W x 17 15/16” (455.5mm) H x 7/8” (22mm) D
Built-In	
Cabinet Width	22 1/16” — 22 3/8” (561 — 568mm)
Minimum Cabinet Depth	min. 21 7/8” (550mm)
Minimum Cabinet Opening Height	17 3/4” — 17 13/16” (448 — 452mm)
Minimum Base Support	125 lbs
Additional Cut-outs Required	No
Electrical	
Electrical Requirements	240/208V AC, 60Hz, 20A circuit
Power Cord	Molded NEMA 14-30 configured plug
Cut out for power cord	Minimum 3” square
Electrical Rating	2900W (240V), 2200W (208V)
Total Amps	12A on 240V, 10.5A on 208V
Shipping	
Shipping Weight	126 lbs
Shipping Dimensions	25 5/8” W (727mm) x 24 13/16” (630mm) H x 27” (686mm) L
Support	
Call	800.843.7231
20/20	2020technologies.com

PRODUCT VIEWS

Fascia

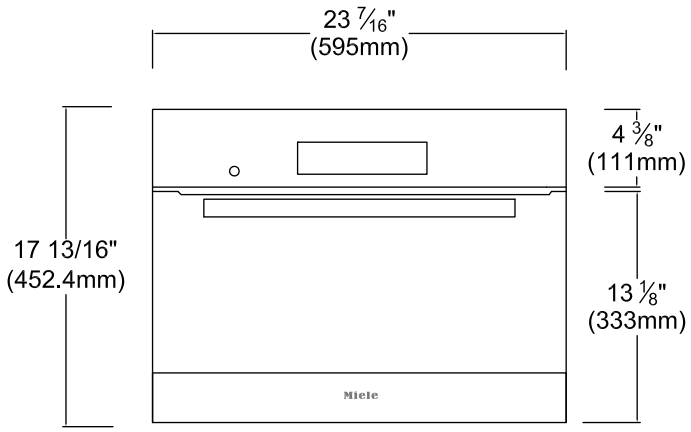

Top View

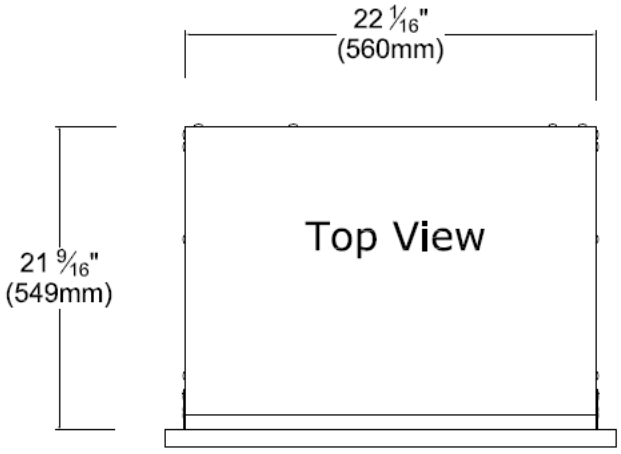

PRODUCT VIEWS

Rear View

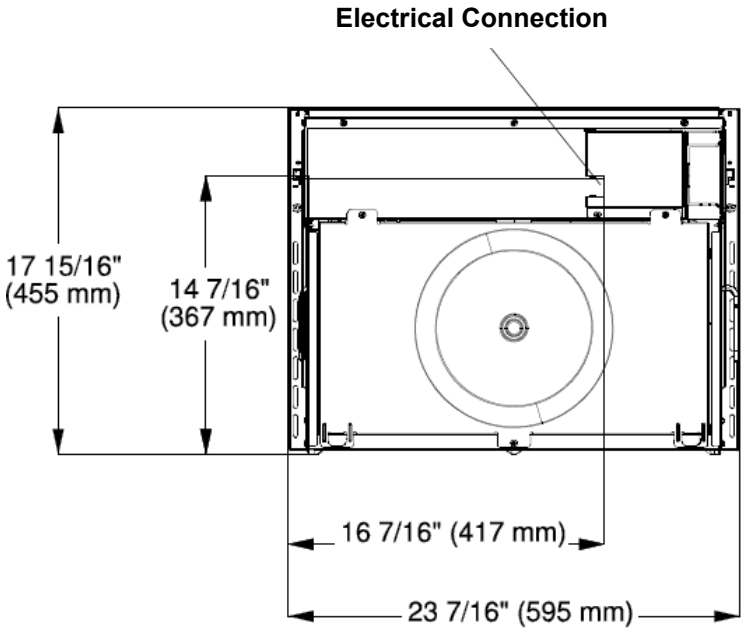

Side View

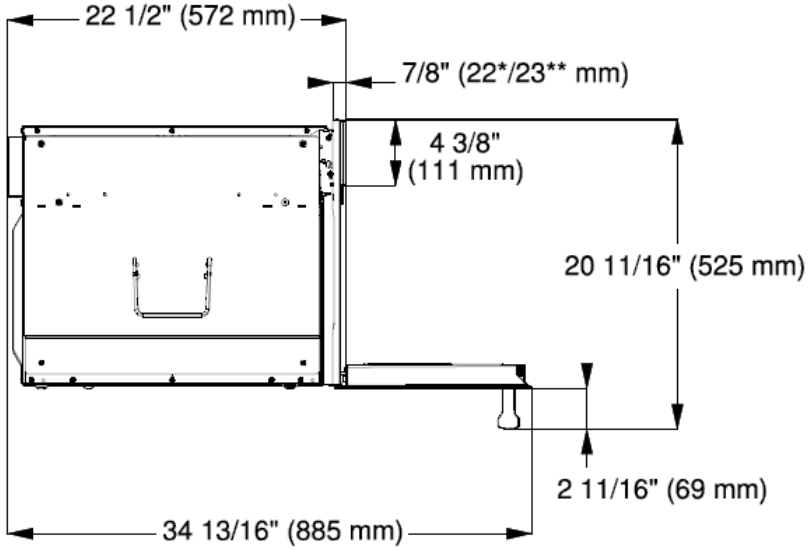

* Oven with glass front
** Oven with metal front

INSTALLATION SPECIFICATIONS

Install in Tall Cabinet

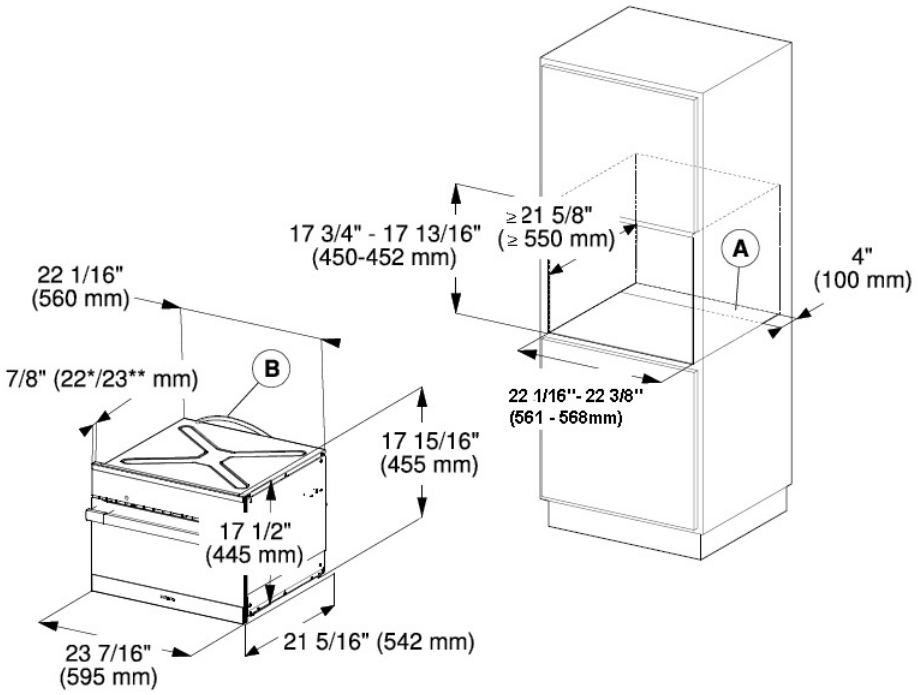

* Oven with glass front
** Oven with metal front

Undercounter Installation

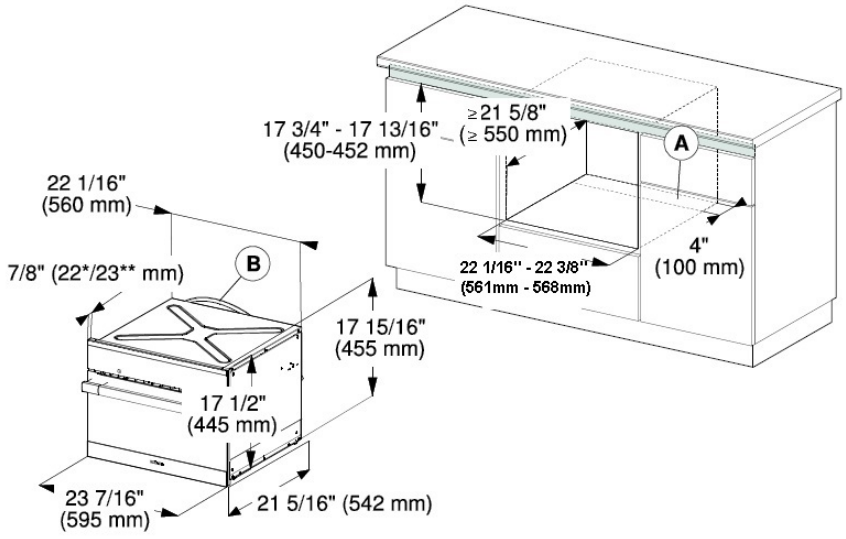

* Oven with glass front
** Oven with metal front

INSTALLATION SPECIFICATIONS

Over 24” Convection Oven Installation

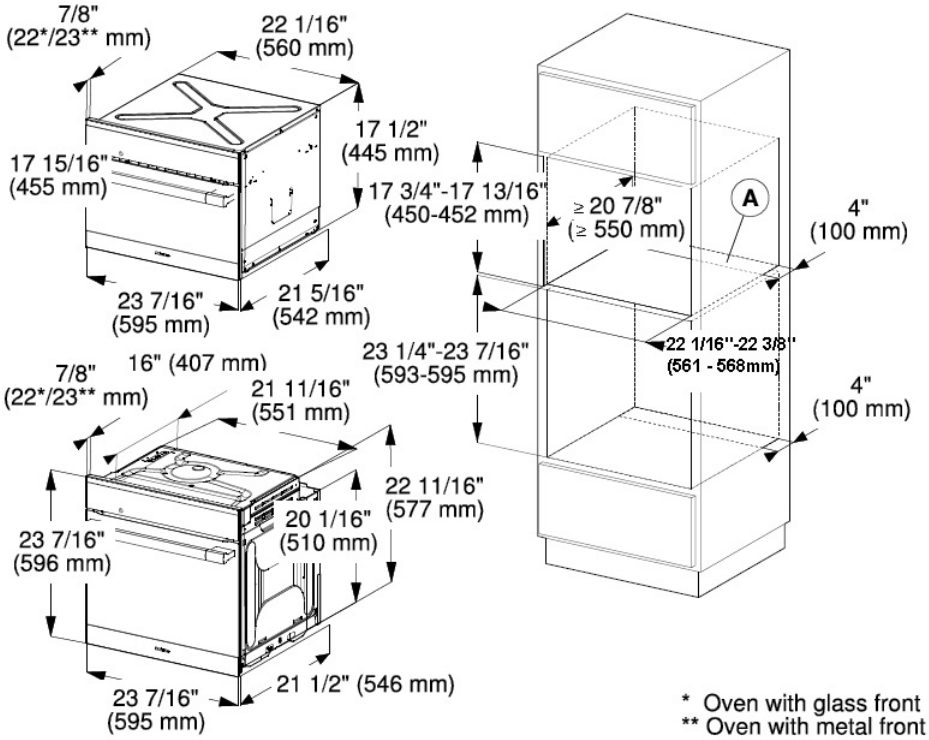

INSTALLATION SPECIFICATIONS

Door Swing

Front dimensions

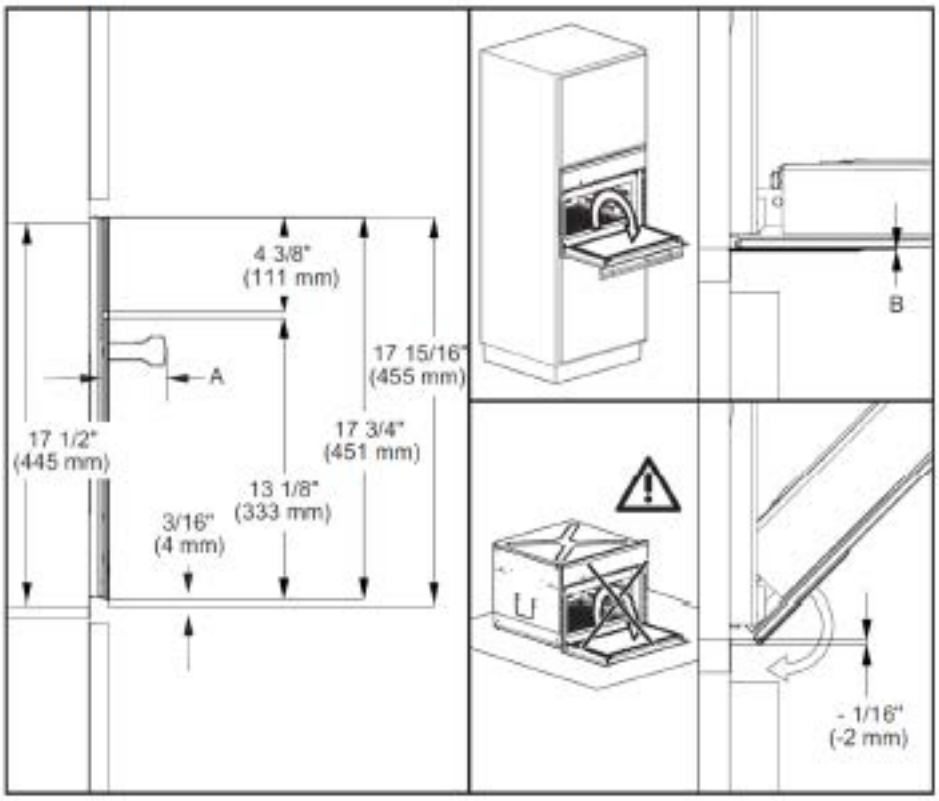

A H67xx: 2 3/4" (69 mm)
H68xx: 1 5/8" (42 mm)

B Speed Oven with glass front: 1/16" (2.2 mm)
Speed Oven with metal front: 1/16 (1.2 mm)